

50WQ-2P 2" Sewag Pumps
SPECIFICATIONS:


DISCHARGE	2" NPT,Vertical
LIQUID TEMPERATURE..	104°F(40°C) Continuous
VOLUTE	Cast Iron ASTM A-48,Class 30
MOTOR HOUSING	Cast Iron ASTM A-48,Class 30
SEAL PLATE	Cast Iron ASTM A-48,Class 30
IMPELLER	Cast Iron ASTM A-48,Class 30 10 Vane, Vortex design Dynamically Balanced,ISO G6.3
SHAFT	420 Stainless Steel
O RING	Buna-N
SEAL: Design	Dual Mechanical Seals
<i>Motor Side</i>	Rotating Face - Carbon Stationary Face - Ceramic
<i>Pump Side</i>	Rotating Face - Silicon Carbide Stationary Face - Silicon Carbide Elastomer - Buna -N Hardware - 300 Series Stainless
CABLE ENTRY	20 Ft Cord With Pressure Grommet for Sealing, UL listed SJTOW
UPPER BEARING	Single Row, Ball
LOWER BEARING	Single Row, Ball
MOTOR	Single Phase, 3450 RPM, 115V, 60 Hz Includes Overload Protection in the motor, Oil Filled,Class B Capacitor Start / Capacitor Run
OPTIONAL EQUIPMENT:	Cord Length & Float Switch

Solids Handling: 1.5"
**Model: 50WQ0.37-2P
50WQ0.55-2P
50WQ0.75-2P**
KEY FEATURES:


- 1.5" Solids-Handling
- Stainless Steel "Keyed" Shaft
- Flows to 160 GPM
- Heads to 33 Feet
- 1/2 HP - 1 HP, 3450 RPM
- 2" NPT Discharge
- Optional Piggyback Float Switch


ELECTRICAL DATA:

MODEL	HP	VOLT	Ph/Hz	RPM	FULL LOAD AMPS	LOCKED ROTOR AMPS	CORD SIZE	CORD TYPE	WEIGHT (LBS)
50WQ0.37-2P	1/2	115/127	1/60	3450	10	37	14/3	SJTOW	57
50WQ0.55-2P	3/4				12	45			58
50WQ0.75-2P	1				15	45			59

50WQ-2P 2" Sewag Pumps

PERFORMANCE CURVE

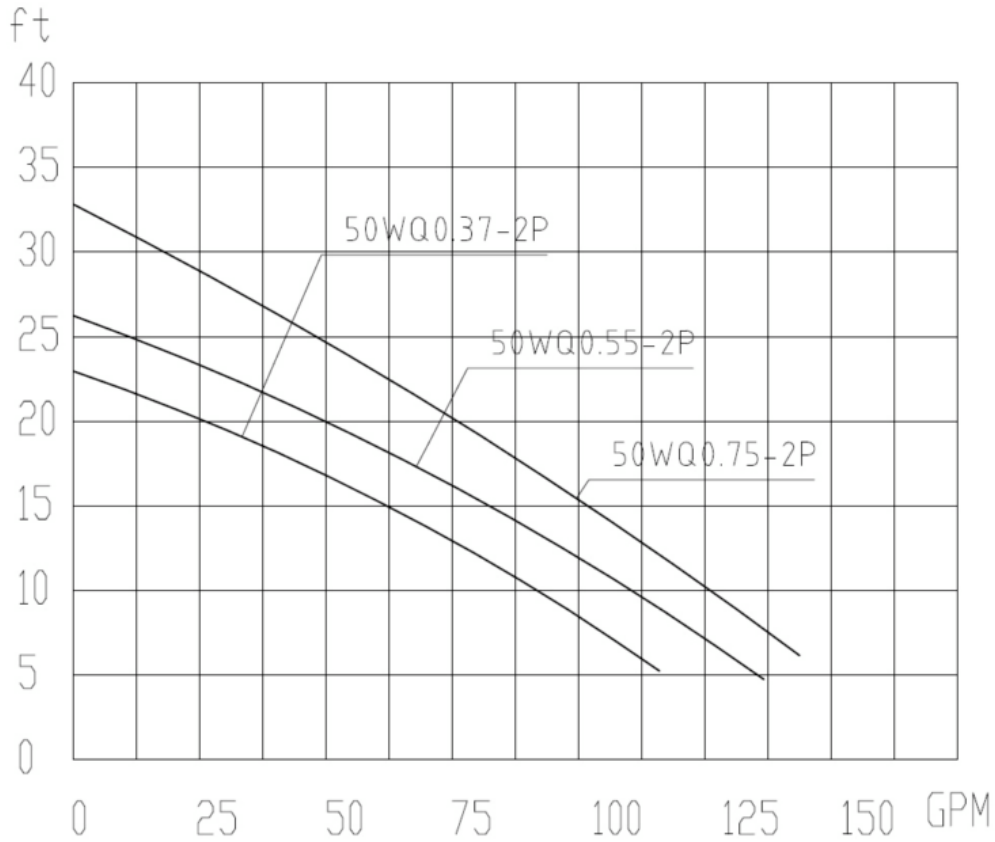

PUMP SIZE

