

80WQ2.2-4P 3HP Sewage Pumps

SPECIFICATIONS:




- DISCHARGE** 3" NPT,Vertical
- LIQUID TEMPERATURE** 104°F(40°C) Continuous
- VOLUTE** Cast Iron ASTM A-48,Class 30
- MOTOR HOUSING** Cast Iron ASTM A-48,Class 30
- SEAL PLATE** Cast Iron ASTM A-48,Class 30
- IMPELLER** Cast Iron ASTM A-48,Class 30
2 Vane, open,Dynamically Balanced
- SHAFT** 420 Stainless Steel
- O RING** Buna-N
- SEAL: Design** Dual Mechanical Seals
 - Motor Side*..... Rotating Face - Carbon
Stationary Face - Ceramic
 - Pump Side*..... Rotating Face - Silicon Carbide
Stationary Face - Silicon Carbide
Elastomer - Buna -N
Hardware - 300 Series Stainless
- CABLE ENTRY** 30 Ft Cord, UL listed SOOW
- UPPER BEARING** Single Row, Ball, Oil lubricated
- LOWER BEARING** Single Row, Ball, Oil Lubricated
- MOTOR** Three Phase, 1750 RPM, 230/460V, 60Hz
Includes Overload Protection in the Motor
Oil Filled,Class B

OPTIONAL EQUIPMENT: Cord Length



Solids Handling: 2"
Model: 80WQ2.2-4P, 230/460V,3 Phase

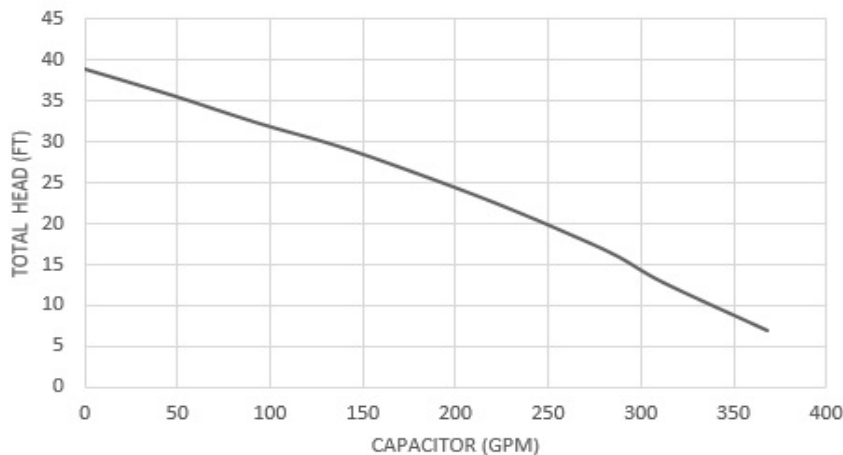

KEY FEATURES:

- 2" Solids-Handling
- Stainless Steel "Keyed" Shaft
- Flows to 390 GPM
- Heads to 39 Feet
- 3HP, 1750 RPM
- 3" NPT Discharge

Pump Size: 19" X 14.5" X 11.8"

MODEL	HP	Volt.	Ph/Hz	RPM	Full Load Amps	Locked Rotor Amps	Cord Type	Cord Size	Weight (Lbs)
80WQ2.2-4P	3	230/460	3/60	1750	7.1/3.5	36/17.5	SOOW	14/4	92