
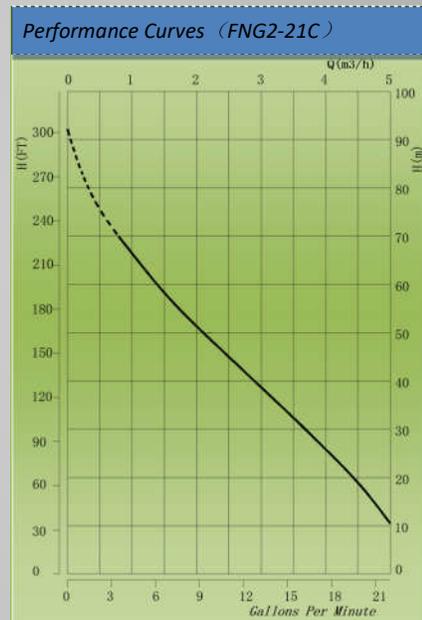


SPECIFICATIONS

Model	Pump	Volts	Amps	HP	PH	HZ	RPM	Weight(lbs)
FNG2-21C-SAJ	FNG2-21C	208-230	<17	2	1	60	3450	118
FNG2-21C-FAJ	FNG2-21C							
FC2-21C-SCJ	FC2-21C		<14.5					115
FC2-21C-FCJ	FC2-21C							
FNG2-21CFZ-FAN	FNG2-21CFZ		<17					115

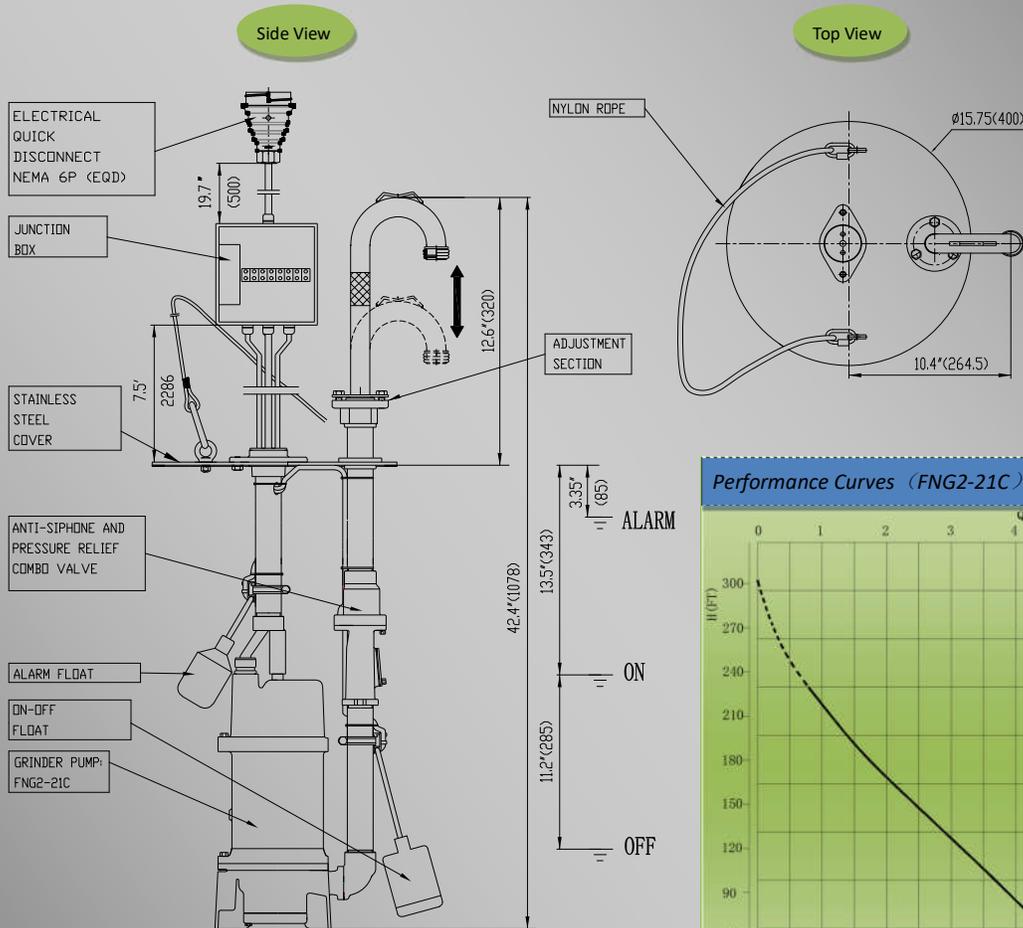


Model: FNG2-21C-SAJ


Features:

- Fast, simple, and easy installation
- Watertight junction box for ease of installation and servicing
- 1-1/4" SST anti-siphon and pressure relief combo valve
- 1-1/4" NPT SST piping
- Adjustable alarm float switch preset at factory
- High starting torque, automatic grinder pump (FNG2-21C) with mechanical float switch
- Quick disconnect plug
- Rigid construction for ease of handling
- Lightweight
- 316 Non-slip stainless steel cover


Side View

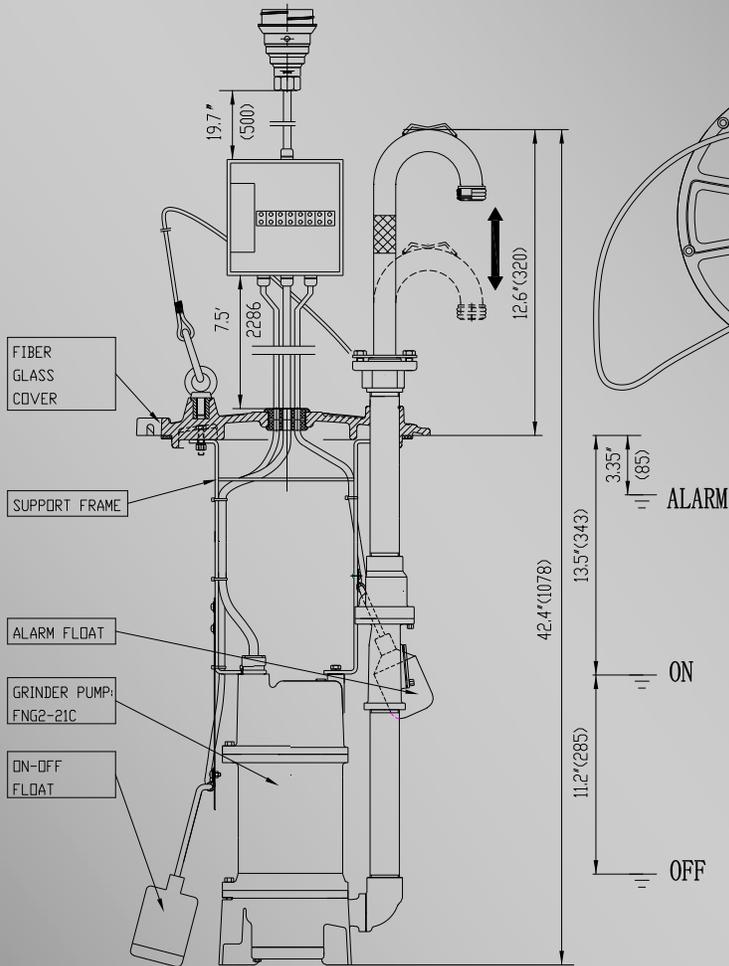

Top View

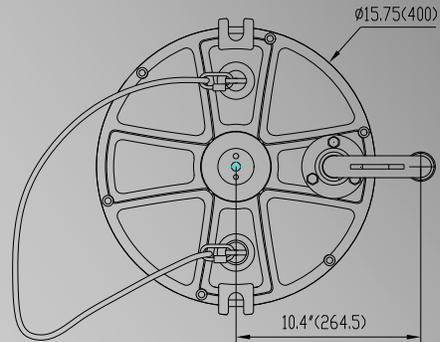


Performance Curves (FNG2-21C)

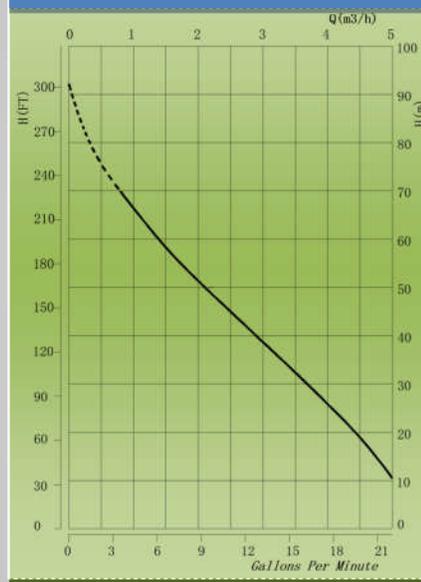


Model: FNG2-21C-FAJ

Features:

- Fast, simple, and easy installation
- Watertight junction box for ease of installation and servicing.
- 1-1/4" SST anti-siphon and pressure relief combo valve
- 1-1/4" NPT SST piping
- Adjustable alarm float switch preset at factory
- High starting torque, automatic grinder pump (FNG2-21C) with mechanical float switch
- Quick disconnect plug
- Rigid construction for ease of handling
- Lightweight
- Fiber glass cover

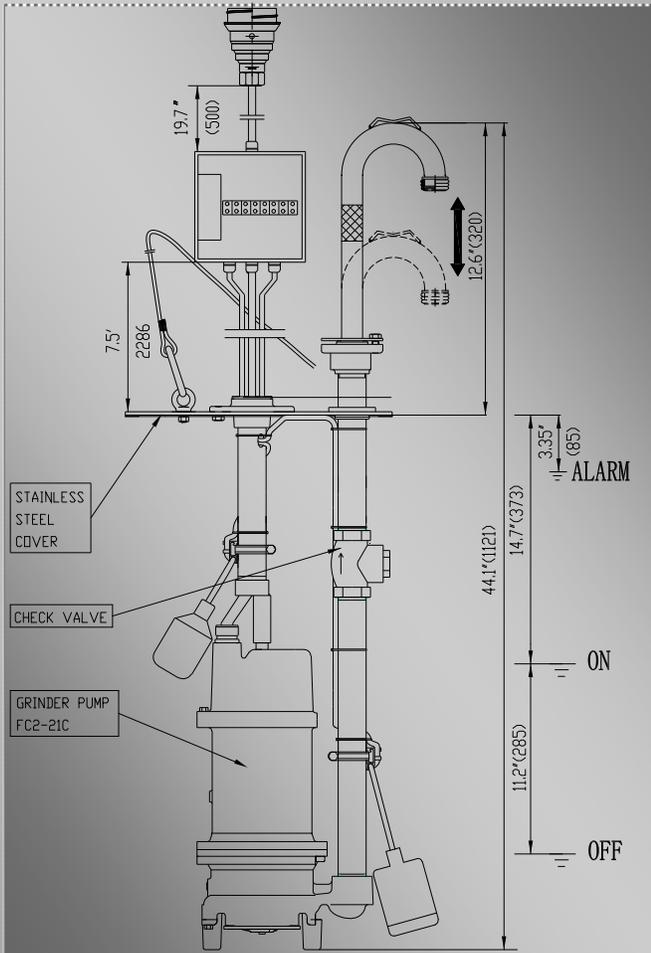

Model: FC2-21C-SCJ

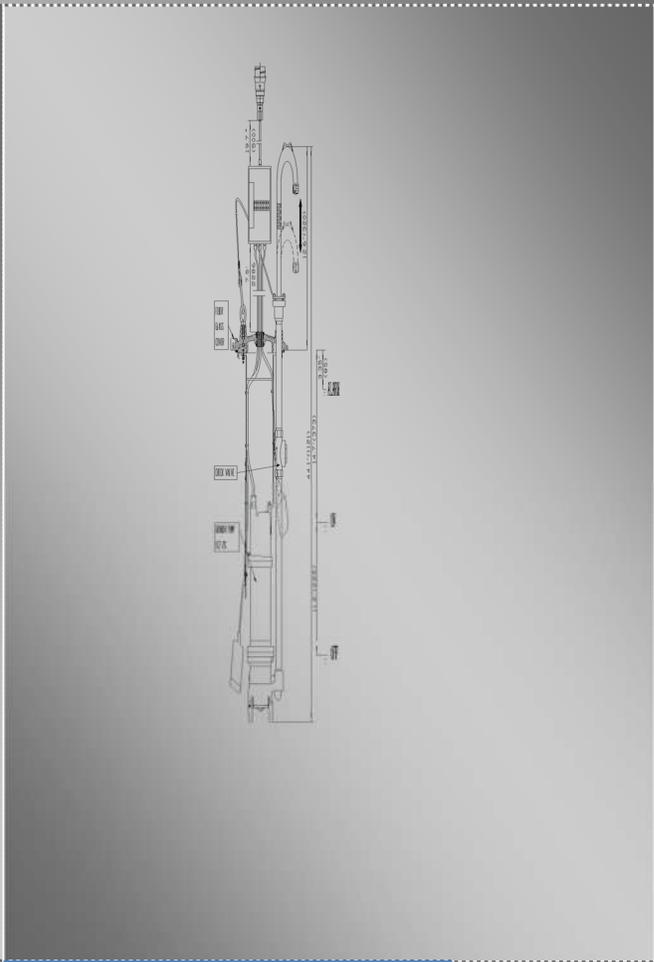




Model: FC2-21C-FCJ

Features:

- Fast, simple, and easy installation
- Watertight junction box for ease of installation and servicing.
- 1-1/4" SST check valve
- 1-1/4" NPT SST piping
- Adjustable alarm float switch preset at factory
- High starting torque, automatic grinder pump (FC2-21C) with mechanical float switch
- Quick disconnect plug
- Rigid construction for ease of handling
- Lightweight
- 316 Non-slip stainless steel cover / Fiber glass cover

Performance Curves(FC2-21C)

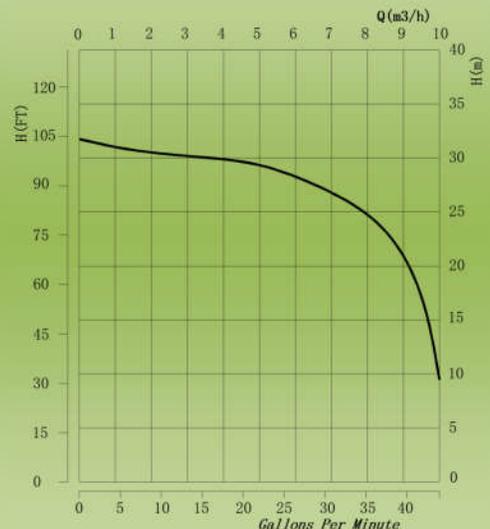

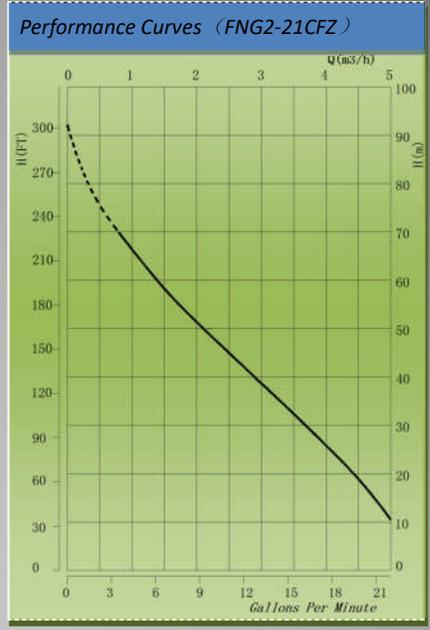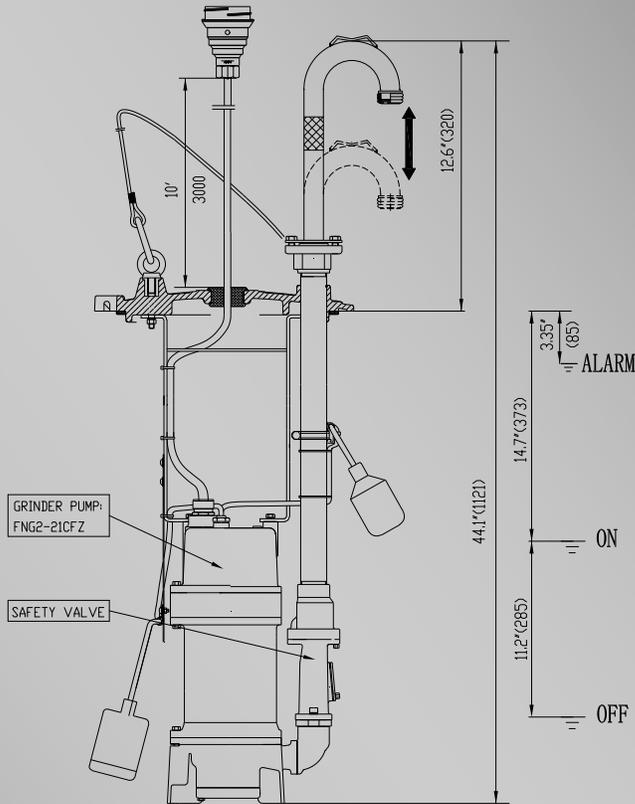

Model: FNG2-21CFZ-FAN

Features:

- Fast, simple, and easy installation
- No junction box, directly connect to E-one original equipment
- 1-1/4" SST anti-siphon and pressure relief combo valve
- 1-1/4" NPT SST piping
- Adjustable alarm float switch preset at factory
- High starting torque, automatic grinder pump (FNG2-21CFZ) with mechanical float switch
- Quick disconnect plug
- Rigid construction for ease of handling
- Lightweight
- Fiber glass cover



**SST cover with
Anti-slip pattern**



Fiber-glass cover



**Adjustable goose-
neck pipe**



**Anti-siphon and
pressure relief
combo valve**

F&Q Pumps Inc.

10617 E. Rush Street, S. El Monte, CA 91733

Ph.: 626-455-0884 Fax: 626-448-9462

sales@fqpumps.com www.fqpumps.com

e/One® is a registered trademark of Environment One Corporation and is not affiliated with F&Q Pumps Inc.