



CFW Sewage Pumps



SPECIFICATIONS:

DISCHARGE 2" NPT, Vertical
LIQUID TEMPERATURE 104°F(40°C) Continuous
VOLUTE .
 Cast Iron ASTM A-48, Class 30
MOTOR HOUSING .
 Cast Iron ASTM A-48, Class 30
SEAL PLATE .
 Cast Iron ASTM A-48, Class 30
IMPELLER .
 Cast Iron ASTM A-48, Class 30
 2 Vane open with pump out vanes
 on back side. Dynamically Balanced
SHAFT 420 Stainless Steel
O RING Buna-N
SEAL .
 Single Seal, Carbon/Ceramic
 Elastomer - Buna -N Hardware
 - 300 Series Stainless
CABLE ENTRY 20 Ft Cord w/Plug
 UL & CUL 14AWG, Type SJTOW
UPPER BEARING Single Row, Ball, Oil lubricated
LOWER BEARING Single Row, Ball, Oil Lubricated

Solids Handling: Up to 2" Dia.

KEY FEATURES:

Model: CFW40M, 4/10HP
CFW40A, 4/10HP
CFW50M, 1/2HP
CFW50A, 1/2HP

- 2" Solids-Handling
- Heavy-Duty Mechanical Seal
- 2 Vane Open Impeller
- Durable, All Cast Iron Construction
- Dependable Operation
- Automatic and Manual Models




MODEL	HP	Volt.	Ph/Hz	RPM	Full Load Amps	Locked Rotor Amps	Cord Type	Cord Size	Cord O.D
CFW40	4/10	115	1/60	1750	12	30	SJTOW	14/3	0.37
CFW50	1/2	115	1/60	1750	12	30	SJTOW	14/3	0.37



CFW Sewage Pumps

PERFORMANCE CURVE

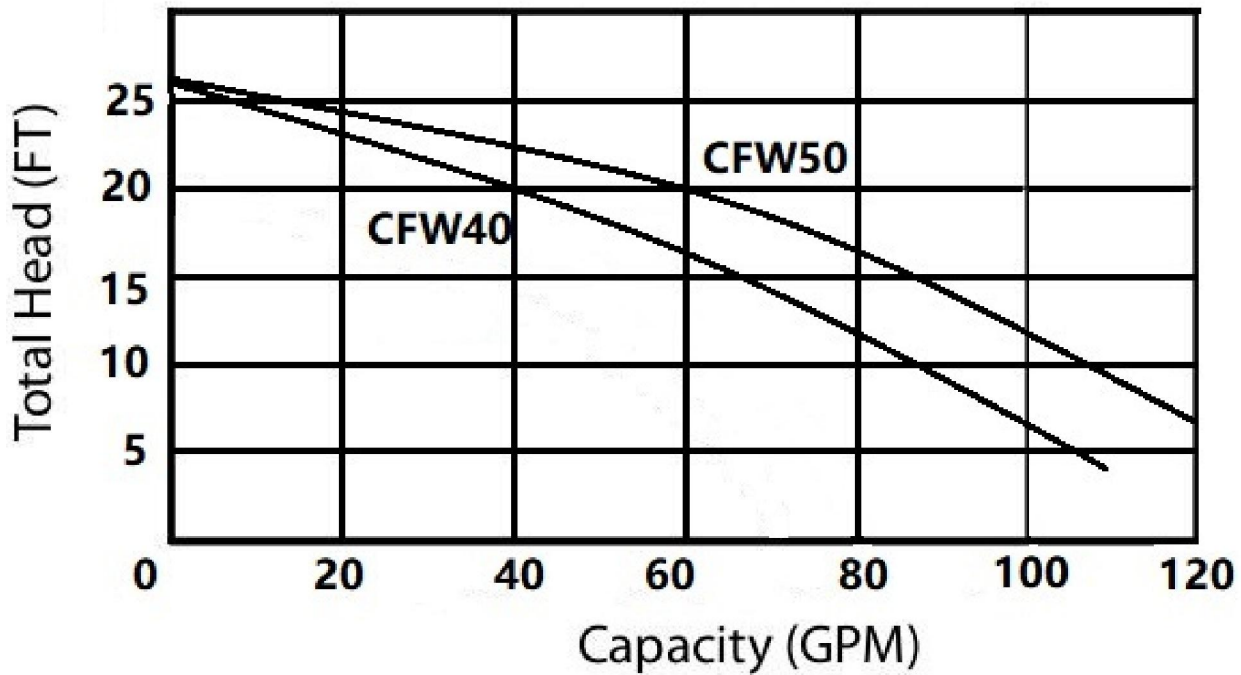

PUMP SIZE

